



DIONICS, INC.

65 Rushmore Street
Westbury, NY 11590

Phone: (516) 997-7474

Fax: (516) 997-7479

Website: www.dionics-usa.com

DIG-1263

Photovoltaic MOSFET Driver

Features:

- Completely Isolated Voltage Signal Generation
- Dielectrically Isolated
- Logic Circuit Compatibility
- High Open Circuit Voltage
- High Operating Temperature
- Fast Response Time
- High Isolation Resistance
- Excellent Input/Output Linearity
- Self Limiting Gate Voltage


Applications:

- Gate Drive For MOS devices
- Gate Drive For SCR
- Solid-State Relays
- Interface Between Logic Circuits & External Loads
- A.T.E. (Automatic Test Equipment)
- Switching Equipment
- Isolation Amplifiers
- Load Control From Microprocessor I/O Ports
- Thermocouple Open Detectors

Description:


The photovoltaic MOSFET driver is a State-of-the-Art, optically coupled floating power source used primarily to control MOSFETs when electrical isolation between input and output is required. The ISO-GATE™ is a state-of-the-art opto-isolator incorporating DIONICS' photovoltaic (PV) diode arrays and an infrared LED. The diode array is a unique I.C. consisting of series-connected photovoltaic diodes. The diodes are completely isolated from each other and from their common substrate by means of SiO₂ Dielectric Isolation (DI). These photovoltaic output chips are electrically isolated but optically coupled to the LED.

The typical input circuit to the LED is a limiting resistor connected in series with the LED. When activated, the LED emits infrared light towards the photovoltaic diode array, which then responds by generating an open circuit voltage (Voc). This Voc is floating and is therefore completely isolated. The Voc value depends on the LED input drive and load impedance. DIONICS, Inc offers a wide variety of package styles including low-cost plastic Mini-DIP's, high reliability TO-5 metal cans, 8-pin ceramic side brazed DIP's and ceramic chip carriers for hybrid manufacturers. Other custom packages and custom designs are also available. Surface mount gull wing packages are also available.

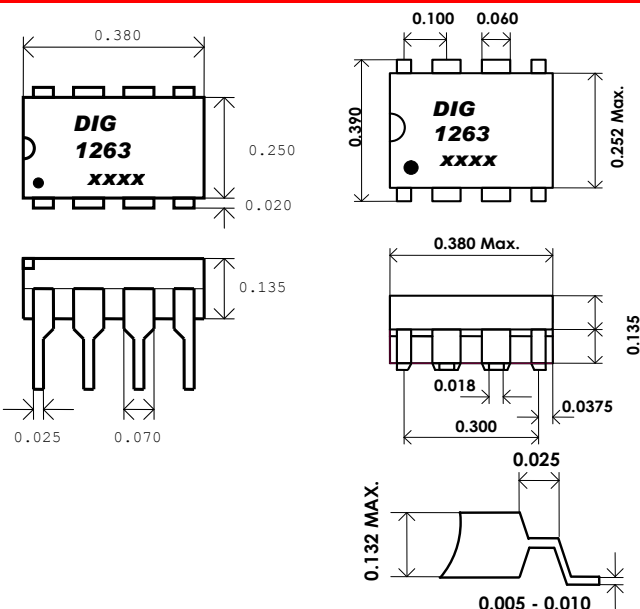

Pin Designation	
Pin Number	DIG-1263
1	Input 1-
2	Input 1+
3	Input 2-
4	Input 2+
5	Output 2+
6	Output 2-
7	Output 1+
8	Output 1-

DIG-1263 Equivalent Circuit

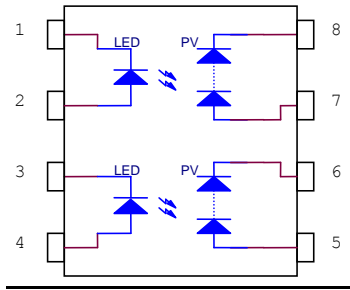

DIG-1263

❖ Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)		
LED Forward Current	Steady State	100 mA
LED Forward Current	Peak 10% Duty Cycle	150 mA
LED Reverse Voltage		10V
Output Discharge Current		15mA
Operating Temperature Range		-50 to 100 $^\circ\text{C}$
Storage Temperature		-50 to 125 $^\circ\text{C}$
Power Dissipation		100 mW

❖ **Individual Channel Electrical Characteristics ($T_a = 25\text{ }^\circ\text{C}$)**

<i>Model Number</i>		<i>DIG-1263</i>			<i>Unit</i>
Parameter & Test Condition	Symbol	Min.	Typ.	Max.	
Open Circuit Voltage					
$I_{led} = 10\text{mA}$	V_{oc}	10.3	13.8	-	V
$I_{led} = 30\text{ mA}; 50\% \text{ Duty Cycle}$			14.6	-	V
Short Circuit Current					
$I_{led} = 10\text{mA}$	I_{sc}	7.5	15.0	-	μA
$I_{led} = 30\text{ mA}; 50\% \text{ Duty Cycle}$			21.0	42.0	-
LED Forward Voltage	V_f				
$I_f = 20\text{mA}$		-	1.3	1.7	V
LED Reverse Current	I_r				
$V_r = 5\text{V}$		0.1	10.0		μA
Off State Voltage	V_{off}				
$I_{off} = 10\mu\text{A}; I_{led} = 0\text{mA}$		-	0.65	0.75	V
Isolation Voltage	V_{iso}	2500	-	-	VDC
Temperature Coefficients	θ_V	-	60	-	$\text{mV} / ^\circ\text{C}$
$I_{led} = 10\text{mA}$	θ_I	-	0.5	-	$\%I / ^\circ\text{C}$
Turn-On Time					
$I_{led} = 30\text{ mA}$ $C = 1500\text{pF}; V_{oc} \text{ to } 10\%$	T_{on}	-	100	-	μs
Turn-Off Time					
$I_f = 50\text{ mA}; C = 10\text{pF}$ $P.W = 100\mu\text{s};$ $f = 1\text{kHz}; R_s = 10\text{M}\Omega$	T_{off}	The Photovoltaic array stops generating current within one microsecond of the trailing edge of LED current. The discharge time is solely dependent upon discharge circuitry and capacitive load.			